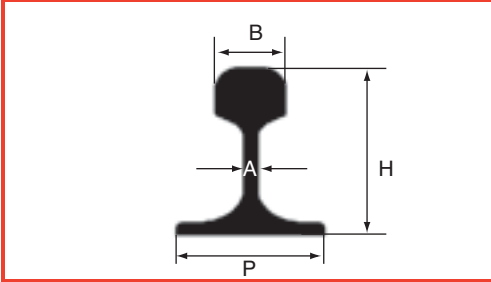
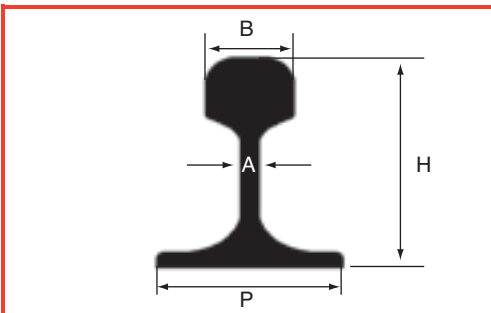
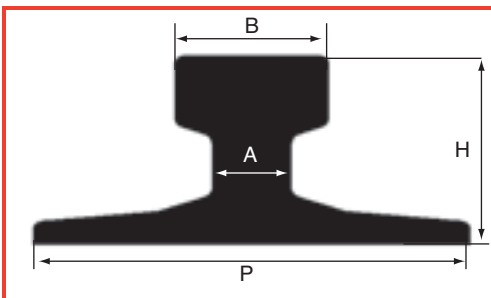


**ROTAIE NUOVE  
TIPO DECAUVILLE**


Modello	Peso kg/ml	H mm	Fungo mm	Suola mm	Lunghezza mt
S 7	6,75	65	25	50	6
S 9	9,3	70	31	57	6
S 10	10	70	32	58	6
S 14	14	80	38	70	6
S 18	18	93	43	82	6-9
S 20	20	100	44	82	6-9

**ROTAIE DA REIMPIEGO  
TIPO FERROVIARIO VIGNOLE**


Sigla	Misure principali				Momento d'inerzia Jx cm4	Modulo di resistenza Wx cm3	Resistenza alla trazione Kg/mm2	Peso Kg/m
	H	B	P	A				
24 AFNOR	115	53	90	10	569	97.3	55	24
26 AFNOR	110	50	100	10	551.4	97.7	55	26
27 AFNOR	120	50	95	11	679.29	109.86	70	27
30 AFNOR	125.5	58.6	106	11	816.6	129.44	70	30
36 UNI 3141	130	60	100	14	1018	154	70	36
46 UNI 3141	145	65	135	14	1682	220	70	46
50 UNI 3141	148	67	135	14	1844	242	70	50
60 UNI 3141	172	72	150	16.5	3055	333.5	70	60

**ROTAIE NUOVE  
TIPO BURBACK**


Sigla	Misure principali				Momento d'inerzia Jx cm4	Modulo di resistenza Wx cm3	Resistenza alla trazione Kg/mm2	Peso Kg/m
	H	B	P	A				
A 45	55	45	125	24	90	27.0	70	22.1
A 55	65	55	150	31	178	45.6	70	31.8
A 65	75	65	175	38	319	71.4	70	43.1
A 75	85	75	200	45	531	105.4	70	56.2
A 100	95	100	200	60	858	162.2	70	74.3
A 120	105	120	220	72	1361	235.1	70	100.0
A 150	150	150	220	80	4373	565.7	70	150.3